


# Product Specifications

## FlashLink® BLE Temperature and Humidity Beacon

<b>Measurement Range</b>	-40°F to 158°F (-40°C to +70°C)
<b>Temperature Accuracy</b>	±3.6°F from 41°F to 140°F (±2°C from 5°C to 60°C) ±2.5°F From < 41°F or > 140°F (±1.4°C From < 5°C or > 60°C)
<b>Temperature Resolution</b>	0.01°C
<b>Humidity Range</b>	0% RH ~ 100% RH
<b>Humidity Accuracy</b>	± 2% RH from 20% RH to 80% RH ±3.5% RH from <20% RH or >80% RH
<b>Advertising Interval</b>	10 seconds
<b>Transmit Range</b>	490ft (150 meters) in open area
<b>Dimensions</b>	2.95 in x 1.49 in x 0.75 in (75 mm x 38 mm x 19 mm)
<b>Weight</b>	1.7oz (48g)
<b>Battery</b>	Lithium Battery
<b>Shelf Life</b>	3 years
<b>Waterproof Rating</b>	IP66
<b>Installation</b>	Double Sided Adhesive
<b>BLE Version</b>	BLE 5.1

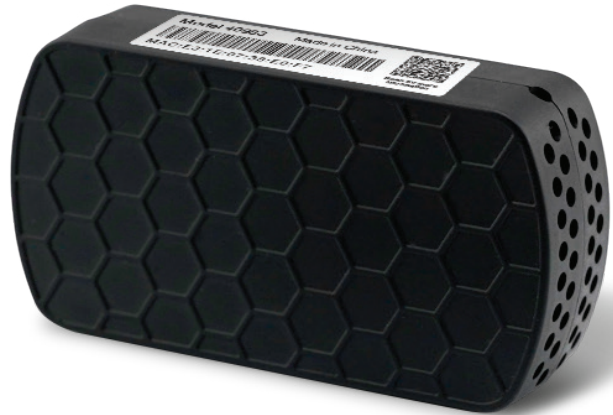

### Model 40983

- Tracks environmental conditions inside containers during shipment
- Wirelessly transmits data by Bluetooth to a Gateway device
- Temperature and Humidity data stored on the FlashTrak web portal
- Easy installation with double sided adhesive

DeltaTrak manufactures and operates under an ISO 9001:2015 registered quality management system

SS 40983 23G2

